



SLADE

One Solution for ALL Your Sealing Needs

REFINERY Packing & Gasket

VALVES

Control Valves
Block Valves

PUMPS

Reciprocating
Rotating

END CONNECTIONS


Man and Hand Hole Gaskets
Heat Exchangers
Pipe Flanges
Manifolds



APPLICATIONS

Emission Safe, Fire Safe, Flue Gas, Caustics, Hydrocarbons,
River Water, Cooling Tower, High Pressure, High
Temperature

3300G Gland Packing

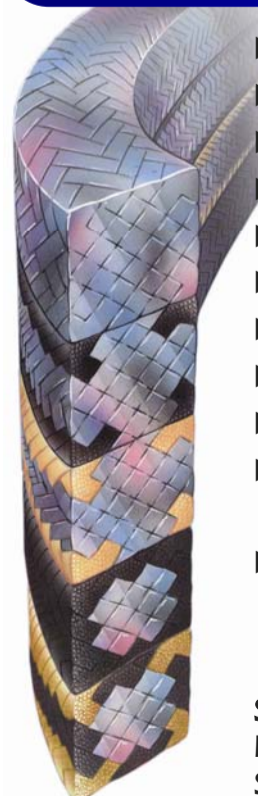

- ▶ One packing for pumps and valves
- ▶ Works well on smoothly or worn sleeves
- ▶ Difficult to over tighten
- ▶ Virtually no leakage in most applications
- ▶ No flush water required in most applications
- ▶ Reduced amperage typical 10% to 15%
- ▶ Outlast typical packing 6 to 1
- ▶ Virtually no shaft wear
- ▶ Handles media within 1-14 pH
- ▶ Extremely high operating temperatures (typically: 1,800°F/1000°C).
- ▶ Approved for sealing VOC by Exxon, Shell, Chevron, Dupont, Eastman Chemical & other companies.

Service Limits: Temp: -400°F to 1,800°F
Pressures: 5,000 psi 345 bar
Speed: 4800 fpm without flush water

Pyro-Tex Joint Sealant

- ▶ HP (high-pressure): made from the same patented stainless-steel foil yarns as our sheet.
- ▶ Standard: made from the same patented carbon fiber reinforced yarns as Slade pump and valve packing.
- ▶ Available on 25 and 50 foot spools in either:



Semi-Round

or



Rectangular


- ▶ Easily installed by overlapping 45 degree angled cut ends just as you would packing rings.



THE HIGH TEMPERATURE GASKET ON A SPOOL.....

Pyro-Tex Sheet Gasket

- ▶ Strength of stainless steel, seal-ability of graphite
- ▶ Able to handle temperatures up to 1,800°F(1000°C)
- ▶ Able to handle pressures up to 4,500 PSI
- ▶ Woven design produces a 'metallic leaf-spring effect'
- ▶ Flexible enough to be rolled up and shipped in tubes.
- ▶ Can be cut by hand with a pair of office shears
- ▶ Slade starts with patented yarns reinforced with flattened strips of stainless steel, and totally encapsulated in flexible graphite.

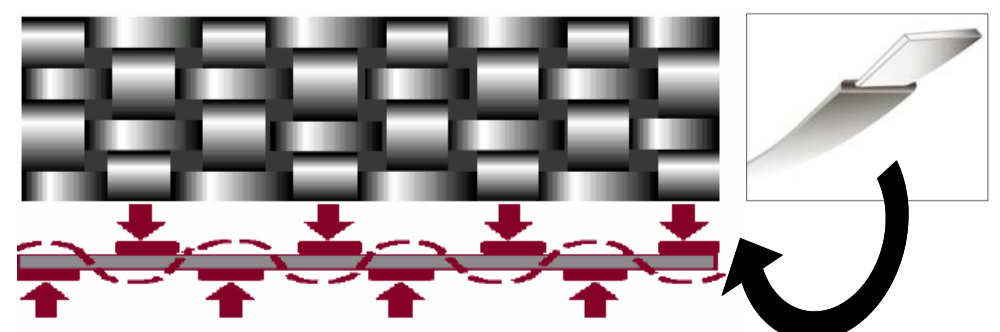

PAULMEN SEALS Ltd

Physical Address:
6/15 Heremai Road,
Henderson
Auckland
New Zealand

Contact Details:
Tel: 0064 9 838 9307
Fax: 0064 9 838 9346
sales@paulmen-seals.co.nz

www.paulmen-seals.co.nz